

A.L.P.-LEXALITE

Test Report Number: 05326  
Test Item Number: PLATFORM II WITH

Report Number	05326
Test Item	PLATFORM II WITH PLATFORM II LENS AND 5000K NORLUX LED BOARD MOUNTED TO INSIDE TOP OF HOUSING
Product Type	LOW BAY
Test Purpose	
Sales Order Reference	
Works Order Number	
Test Item Reference	
Lab Test Method Reference	
Test Standards	IESNA LM-79-08
Lab Location Reference	
Tested by	1860
Date of Test	6/29/2015
Number of products Tested	
Analysed By	
Authorised Date	

A.L.P.-LEXALITE



Test Report Number: 05326  
 Test Item Number: PLATFORM II WITH

Product Name	PLATFORM II WITH PLATFORM II LENS AND 5000K NORLUX LED BOARD MOUNTED TO INSIDE TOP OF HOUSING
Part / Serial Number	PLATFORM II
Type of Product	LOW BAY
Base Type	
Driver Type	THOMAS RESEARCH PRODUCTS PLED96W-034-C2800-D
Operating Orientation	PENDENT
Test Orientation	PENDENT
Manufacturer	A.L.P.-LEXALITE
Date of Manufacture	
Thermal Management	
Dimmable	

Test Time (minutes)	Ambient Temperature (deg C)	Relative Humidity (%RH)	Pre-burning Time (hours)	Stabilisation Time (minutes)
120.00	24.50	0.00	0.00	81.00

#### Photometric Measurements

Total Luminous Flux (lm)	Electrical Power (W)	Luminous Efficacy (lm/W)	Test Distance (m)
8582.8	96.30	89.13	6.78

#### Electrical Measurements

Power Factor	Power (W)	Voltage (V)	Current (A)	Apparent Power (VA)	Frequency (Hz)	Current THD (%)	Voltage THD (%)
1.00	96.30	120.01	0.81	0.00	60.00	5.54	0.00

Test Report Number: 05326  
Test Item Number: PLATFORM II WITH

## Zonal Lumen Summary



	Summary Zonal Lumens	Zonal Lumens - % Lamp	Zonal Lumens - % Fixture
0 to 30	1141.33	13.30	13.30
0 to 40	2228.27	25.96	25.96
0 to 60	5519.63	64.31	64.31
0 to 90	8186.06	95.38	95.38
40 to 90	5957.79	69.42	69.42
60 to 90	2666.43	31.07	31.07
90 to 180	396.77	4.62	4.62
0 to 180	8582.83	100.00	100.00

Test Report Number: 05326  
 Test Item Number: PLATFORM II WITH

### Luminaire Dimensions

Sample Diameter/Length (mm)	Sample Width (mm)	Sample Height/Depth (mm)	Luminous Diameter/Length (mm)	Luminous Width (mm)	Luminous Height/Depth (mm)	Luminous C0-plane (mm)	Luminous C90-plane (mm)	Luminous C180-plane (mm)	Luminous C270-plane (mm)
-304.80	-304.80	-20421.60	-304.80	-304.80	-20421.60	-20421.60	-20421.60	-20421.60	-20421.60

### Polar Plot (cd)

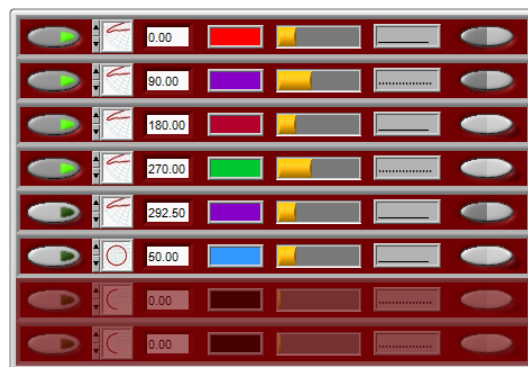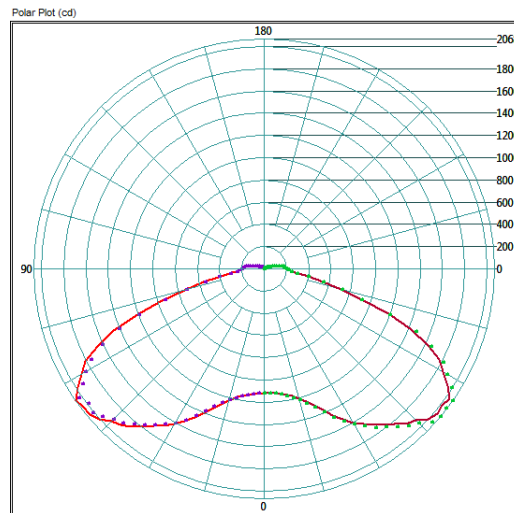

Test Report Number: 05326  
 Test Item Number: PLATFORM II WITH

### Coefficients of Utilisation

#### IES Spacing Criterion

Spacing Criterion (0 to 180)	Spacing Criterion (90 to 270)	Spacing Criterion (diagonal)
2.32	2.32	2.29

#### Proportion of Upward and Downward Flux from Luminaire

LOR (%)	Proportion of Upward Flux from Luminaire	Proportion of Downward Flux from Luminaire	Fixture Total Flux (lm)
100.00	0.00	0.00	8582.83

#### Table of Coefficients of Utilisation

RCC%	80	80	80	80	70	70	70	70	50	50	50	50	30	30	30	30	10	10	10	10	0	0	0	0
RW%	70	50	30	0	70	50	30	0	70	50	30	0	70	50	30	0	70	50	30	0	70	50	30	0
RFC%	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
RCR = 0	1.18	1.18	1.18	1.18	1.15	1.15	1.15	1.15	1.09	1.09	1.09	1.09	1.03	1.03	1.03	1.03	0.98	0.98	0.98	0.98	0.95	0.95	0.95	0.95
RCR = 1	1.05	1.00	0.95	0.88	1.02	0.97	0.92	0.86	0.96	0.92	0.88	0.83	0.90	0.87	0.84	0.80	0.85	0.83	0.80	0.77	0.83	0.81	0.78	0.75
RCR = 2	0.94	0.84	0.76	0.67	0.91	0.82	0.75	0.66	0.85	0.78	0.71	0.64	0.79	0.74	0.68	0.62	0.75	0.70	0.65	0.60	0.72	0.68	0.64	0.59
RCR = 3	0.84	0.72	0.63	0.52	0.81	0.70	0.61	0.51	0.75	0.66	0.59	0.50	0.70	0.63	0.56	0.49	0.66	0.59	0.54	0.47	0.64	0.58	0.53	0.47
RCR = 4	0.76	0.62	0.52	0.41	0.73	0.60	0.51	0.41	0.68	0.57	0.49	0.40	0.63	0.54	0.47	0.39	0.59	0.51	0.45	0.38	0.57	0.50	0.45	0.38
RCR = 5	0.69	0.54	0.44	0.34	0.66	0.53	0.43	0.33	0.61	0.50	0.42	0.33	0.57	0.47	0.40	0.32	0.53	0.45	0.39	0.31	0.51	0.44	0.38	0.31
RCR = 6	0.63	0.48	0.38	0.28	0.60	0.47	0.37	0.28	0.56	0.44	0.36	0.27	0.52	0.42	0.35	0.27	0.49	0.40	0.33	0.26	0.47	0.39	0.33	0.26
RCR = 7	0.58	0.43	0.33	0.23	0.55	0.42	0.32	0.23	0.51	0.39	0.31	0.23	0.48	0.38	0.30	0.22	0.45	0.36	0.29	0.22	0.43	0.35	0.29	0.22
RCR = 8	0.53	0.38	0.29	0.20	0.51	0.37	0.28	0.20	0.48	0.36	0.28	0.20	0.44	0.34	0.27	0.19	0.41	0.32	0.26	0.19	0.40	0.32	0.25	0.19
RCR = 9	0.49	0.35	0.26	0.17	0.48	0.34	0.25	0.17	0.44	0.32	0.25	0.17	0.41	0.31	0.24	0.17	0.39	0.29	0.23	0.16	0.37	0.29	0.23	0.16
RCR = 10	0.46	0.32	0.23	0.15	0.44	0.31	0.23	0.15	0.41	0.30	0.22	0.15	0.39	0.28	0.21	0.15	0.36	0.27	0.21	0.14	0.35	0.26	0.20	0.14

## UGR Table

Reference Standard:

CIE 190:2010

<b>UGR Table</b>											
Ceiling Reflectance		70	70	50	50	30	70	70	50	50	30
Wall Reflectance		50	30	50	30	30	50	30	50	30	30
Floor Reflectance		20	20	20	20	20	20	20	20	20	20
Room dimensions X                      Y		Viewed Crosswise					Viewed Endwise				
2H	2H	1.2	2.9	1.6	3.3	3.7	1.1	2.8	1.5	3.2	3.6
	3H	2.7	4.3	3.1	4.7	5.2	2.6	4.2	3.0	4.6	5.1
	4H	3.0	4.5	3.5	5.0	5.4	2.9	4.4	3.4	4.9	5.3
	6H	3.2	4.6	3.6	5.0	5.5	3.1	4.5	3.6	4.9	5.4
	8H	3.2	4.5	3.7	5.0	5.5	3.1	4.5	3.6	4.9	5.4
	12H	3.2	4.5	3.7	5.0	5.5	3.1	4.4	3.6	4.9	5.4
4H	2H	1.7	3.2	2.1	3.6	4.1	1.6	3.1	2.1	3.5	4.0
	3H	3.3	4.6	3.8	5.0	5.5	3.2	4.5	3.7	5.0	5.5
	4H	3.7	4.8	4.2	5.3	5.9	3.6	4.8	4.1	5.3	5.8
	6H	3.9	4.9	4.4	5.4	6.0	3.8	4.9	4.4	5.4	5.9
	8H	3.9	4.9	4.5	5.4	6.0	3.9	4.9	4.4	5.4	5.9
	12H	4.0	4.8	4.5	5.4	6.0	4.0	4.8	4.5	5.4	5.9
8H	4H	3.8	4.7	4.3	5.3	5.8	3.8	4.7	4.3	5.2	5.8
	6H	4.0	4.8	4.6	5.4	6.0	4.0	4.8	4.6	5.4	6.0
	8H	4.1	4.8	4.7	5.4	6.0	4.1	4.8	4.7	5.4	6.0
	12H	4.2	4.8	4.8	5.4	6.0	4.2	4.8	4.8	5.4	6.0
12H	4H	3.8	4.6	4.3	5.2	5.8	3.8	4.6	4.3	5.2	5.7
	6H	4.0	4.8	4.6	5.3	5.9	4.0	4.8	4.6	5.3	5.9
	8H	4.1	4.8	4.7	5.3	6.0	4.1	4.8	4.7	5.3	6.0



A.L.P.-LEXALITE

Test Report Number: 05326  
Test Item Number: PLATFORM II WITH

### Candela Table (cd)

	360.0
0.0	1121.5
2.5	1130.8
5.0	1131.7
7.5	1143.6
10.0	1163.7
12.5	1192.4
15.0	1225.0
17.5	1274.8
20.0	1329.7
22.5	1404.2
25.0	1473.0
27.5	1548.3
30.0	1612.0
32.5	1673.7
35.0	1728.9
37.5	1792.7
40.0	1856.5
42.5	1901.7
45.0	1939.3
47.5	2009.2
50.0	2038.0
52.5	2040.9
55.0	2059.5
57.5	1982.0
60.0	1897.3
62.5	1809.2
65.0	1648.9
67.5	1471.8
70.0	1227.7
72.5	957.9
75.0	742.5
77.5	560.5
80.0	417.1
82.5	312.9
85.0	250.1
87.5	218.9
90.0	201.8
92.5	189.7
95.0	178.6
97.5	165.9
100.0	150.8
102.5	131.7
105.0	109.2
107.5	87.6
110.0	69.5
112.5	55.5
115.0	45.1
117.5	37.6
120.0	31.9
122.5	27.4
125.0	23.6
127.5	20.3
130.0	17.2
132.5	13.9



Test Report Number: 05326  
 Test Item Number: PLATFORM II WITH

## Candela Table (cd)

	0.0	22.5	45.0	67.5	90.0	112.5	135.0	157.5	180.0	202.5	225.0	247.5	270.0	292.5	315.0	337.5
135.0	11.0	10.4	10.2	10.6	11.3	11.6	12.0	12.4	11.1	10.9	10.6	9.7	10.1	10.7	10.2	9.8
137.5	8.6	8.1	8.0	8.3	8.8	9.0	9.4	9.7	8.5	8.3	8.0	7.3	7.7	8.1	7.7	7.4
140.0	6.7	6.4	6.3	6.5	6.9	7.0	7.3	7.5	6.4	6.3	6.1	5.7	6.0	6.1	5.8	5.6
142.5	5.3	5.2	5.0	5.4	5.6	5.7	5.7	6.0	5.0	4.9	4.8	4.6	4.8	4.8	4.5	4.5
145.0	4.5	4.5	4.4	4.5	4.7	4.8	4.8	5.0	3.9	4.0	3.9	3.9	3.9	4.0	3.8	3.8
147.5	4.2	4.3	4.2	4.3	4.3	4.4	4.3	4.4	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
150.0	4.1	4.2	4.2	4.2	4.2	4.4	4.3	4.3	3.4	3.5	3.5	3.5	3.4	3.4	3.5	3.4
152.5	4.1	4.2	4.2	4.2	4.2	4.3	4.3	4.3	3.5	3.6	3.5	3.5	3.5	3.5	3.5	3.4
155.0	4.2	4.2	4.2	4.2	4.2	4.2	4.2	4.2	3.5	3.4	3.5	3.5	3.5	3.5	3.5	3.5
157.5	4.1	4.1	4.1	4.2	4.2	4.2	4.2	4.2	3.5	3.5	3.4	3.5	3.5	3.4	3.5	3.4
160.0	4.0	4.0	4.1	4.1	4.1	4.1	4.1	4.2	3.5	3.5	3.5	3.5	3.5	3.4	3.5	3.4
162.5	4.0	4.0	4.0	4.0	4.1	4.0	4.1	4.1	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
165.0	3.9	4.0	4.0	4.0	4.0	4.0	4.1	4.0	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
167.5	3.9	4.0	3.9	3.9	4.0	4.0	4.0	4.0	3.4	3.5	3.5	3.5	3.5	3.5	3.5	3.5
170.0	3.8	3.9	3.9	3.9	3.9	3.9	4.0	3.9	3.5	3.6	3.6	3.6	3.6	3.6	3.6	3.6
172.5	3.8	3.9	3.9	3.8	3.8	3.9	3.9	3.9	3.5	3.6	3.6	3.6	3.6	3.6	3.6	3.6
175.0	3.6	3.7	3.7	3.7	3.8	3.7	3.8	3.8	3.6	3.6	3.5	3.5	3.6	3.6	3.6	3.5
177.5	3.5	3.6	3.6	3.6	3.6	3.7	3.7	3.6	3.5	3.5	3.4	3.5	3.5	3.5	3.5	3.5
180.0	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5

A.L.P.-LEXALITE

Test Report Number: 05326  
Test Item Number: PLATFORM II WITH

### Candela Table (cd)

	360.0
135.0	11.0
137.5	8.6
140.0	6.7
142.5	5.3
145.0	4.5
147.5	4.2
150.0	4.1
152.5	4.1
155.0	4.2
157.5	4.1
160.0	4.0
162.5	4.0
165.0	3.9
167.5	3.9
170.0	3.8
172.5	3.8
175.0	3.6
177.5	3.5
180.0	3.5