

Description

Convert 4-1/4" wide strip fixtures to 1 or 2 T8 lamps easily, quickly and economically. A.L.P. offers two outstanding reflector kits to retrofit 8' or 4' strip fixtures to the more efficient T8 lamps.

The 5000 Series Kit is a complete reflector system, including socket plates for lamp relocation, to provide maximum efficiency. Used to delamp from 4-lamps to 2-lamps in fluorescent strip fixtures. This retrofit system allows for removal and discarding of the ballast cover, relocation of lamps, optimizing light output and reducing energy consumption to comply with utility rebate requirements.

Features and Benefits

Anodized Aluminum (RA) reflectors are manufactured from 0.025" thick aluminum with an 86% minimum reflectance. Designed and manufactured in compliance with U.L. Standards for retrofit reflectors. The 5000 Series is U.L. Classified as a ballast cover.

Applications

Suitable for relamping in commercial, industrial and institutional applications.

Ordering Information

Please call 877-257-5841 for price and delivery.

Notice

Reflector kits do not come with a ballast and are not pre-wired. A.L.P. assumes no responsibility for suitability of these materials in any luminaire or application. Please test for fit and function prior to ordering project quantities. Dimensions subject to change without notice.

Specifications

Reflector:

Anodized Aluminum

Efficiency:

RA: 86% standard specular

RM: 94% specular




RW: 90% diffuse white

Options:


Socket Plate

End Caps

Profile End Drawing

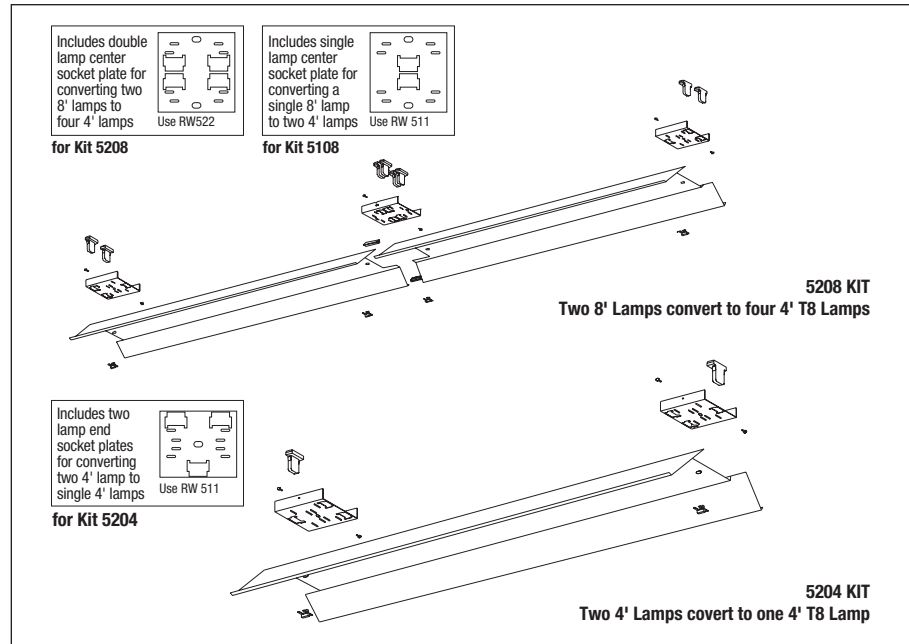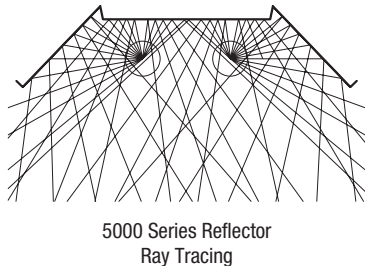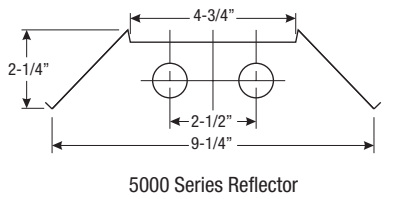

Accessories

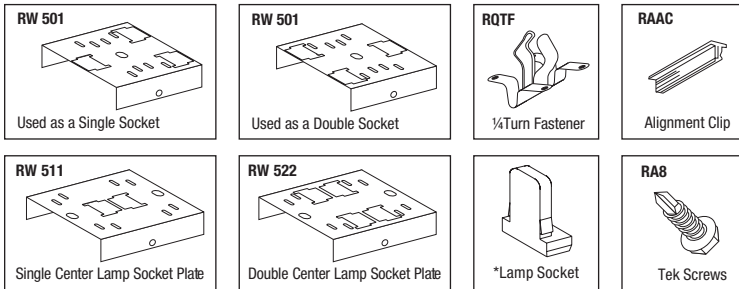

Catalog Number	Description
RA 5108 (Kit)	(1) 8' Lamp converts to (2) 4' T8 Lamps (Std Specular)
RA 5208 (Kit)	(2) 8' Lamp converts to (4) 4' T8 Lamps (Std Specular)
Includes	
RA 5004	4' Reflector (2 Per Kit)
RW 501*	Single or Double Socket Plate (2 Per Kit)
RW 511*	Single Lamp Center Socket Plate for RA 5108 (1 Per Kit)
RW 522*	Double Lamp Center Socket Plate for RA 5208 (1 Per Kit)
Also:	(6) TEK Screws, (4) 1/4 Turn Fasteners, (2) Alignment Clips (4) Lamp Sockets for RA 5108 or (8) Lamp Sockets for RA 5208

Catalog Number	Description
RA 5204 (Kit)	(2) 4' Lamp converts to (1) 4' T8 Lamp (Anodized Aluminum)
Includes	
RA 5004	4' Reflector (1 Per Kit)
RW 501*	Single or Double Socket Plate (2 Per Kit)
Also:	(4) TEK Screws, (2) 1/4 Turn Fasteners, (2) Lamp Sockets for RA 5204

Note: For Highly Reflective Specular Aluminum, Delete Prefix "RA" and Replace with "RM" or for White Aluminum Delete "RA" and Replace with "RW". Alternate reflector to fit our SEP strips (RA 5004SEP, RW 5004SEP, RM 5004SEP).

***Note:** All RW 501, RW 511 and RW 522 socket plate use slide-on lampholders. Do not use snap-in lampholders.

Notice

Reflector kits do not come with a ballast and are not pre-wired. A.L.P. assumes no responsibility for suitability of these materials in any luminaire or application. Please test for fit and function prior to ordering project quantities. Dimensions subject to change without notice.