




Model 200

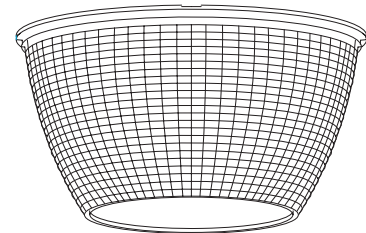

Dimensions

8.12" high
15.9" diameter

Materials

Acrylic:
Clear
Polycarbonate with UvaLex®:
Clear

General Description

These 15.9" diameter refractors are designed with open and closed bottoms. Open bottoms refractors provide re-lamping and maintenance ease, while closed bottom refractors provide additional protection from the light source.

Features and Benefits

- Rated up to 400watts
- Provides optical batwing distribution.
- Available in Type II which provides roadway and street lighting and Type V symmetrical lighting.
- Models 200 (closed bottom) and 205 (open bottom) are molded in Clear Polycarbonate with UvaLex® for areas where breakage and high ambient heat are concerns.
- Models 210 (closed bottom) and 215 (open bottom) are molded using UV stabilized Clear Acrylic for high efficiency in general lighting applications.

Applications

Typically used in roadway, area and industrial lighting applications. Compatible with halogen and compact fluorescent, HID, and LED lamp sources.

Before final installation, dissipate static on parts by spraying with de-staticized air or by wiping with a clean, damp rag. This will help minimize dust build up.

Service Life

The service life of acrylic refractors is virtually unlimited when used within the recommended temperature limit. Polycarbonate refractors are subject to yellowing especially when used with high ultraviolet output light sources; this effect is enhanced at high temperatures.


Ordering Information

Please call 877-257-5841 for pricing and delivery.

Type V Fixture Performance for Reference Only

Report Number: ITL37326
Total Luminaire Efficiency: 62.2%
IES Classification: Type V, Semi-cutoff
Arc Tube Voltage Rise: 1.8

Tested in accordance with IES standards.
 Photometry based on a 250W HPS lamp

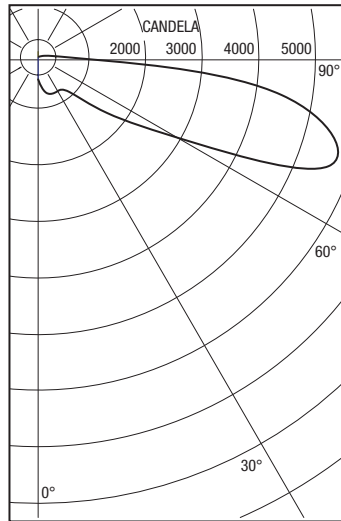

Materials

See the LexaLite® brand price list for current part numbers and material offerings. Up-to-date and detailed material specifications can be found in the Resources section on our website www.alpadvantage.com.


When using acrylic, the surface temperature of the lens should not exceed 80°C. When using polycarbonate, the surface temperature of the lens should not exceed 90°C.

UvaLex® is LexaLite's proprietary treatment to retard yellowing in ultraviolet environments and is standard on these polycarbonate refractors.

Notice

A.L.P. assumes no responsibility for suitability of these materials in any luminaire or application. Please test for fit and function prior to ordering project quantities.

While A.L.P. utilizes IESNA testing procedures and believes our testing results to be accurate, A.L.P. provides photometry for reference only. Actual results will vary based on the actual light source(s) and power source(s) used, i.e. ballast, driver generator, etc. and the combinations in which they are used, as well as operating temperatures, and other electrical and environmental variables. We urge that customers perform their own fixture qualifications prior to making performance based claims. In no event will A.L.P. be liable for any loss, damage, including without limitation, indirect or consequential loss or damage in connection with the use of this information.

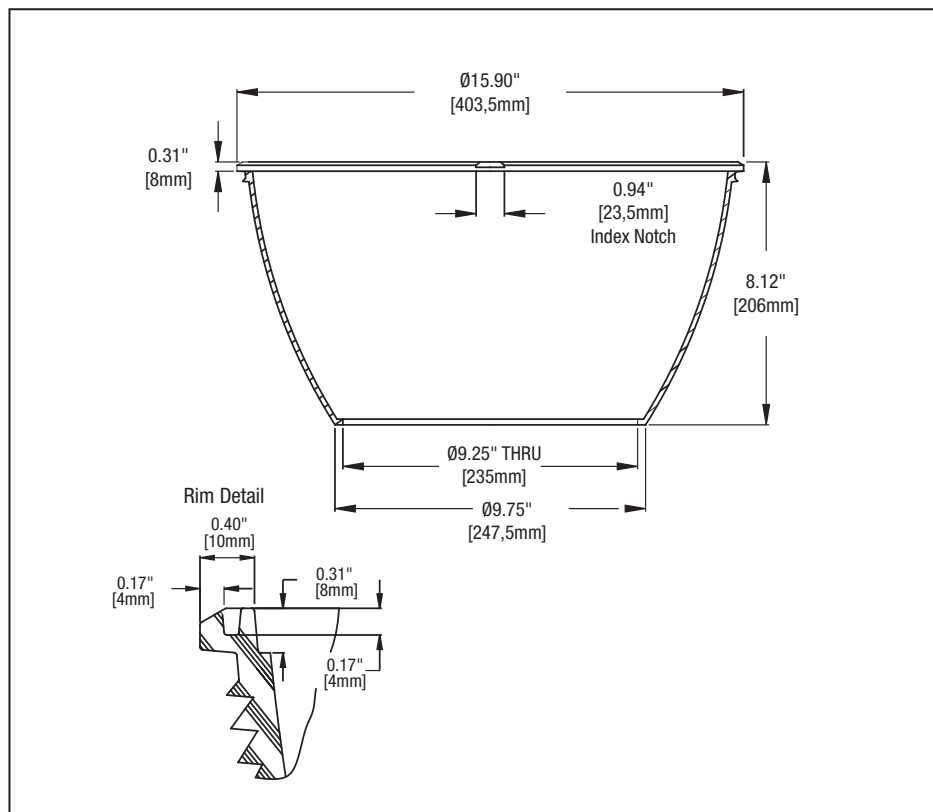

This drawing is for reference only. Actual part dimensions will vary. Customer is urged to review actual samples to confirm fit and function. All specifications and dimensions are subject to change without notice.