



# 2' Sentry® Series

Fluorescent and LED

## Housing

Compression molded self-extinguishing fiberglass reinforced polyester compound with UL 5VA flame rating (ASTM D635-74) for gear tray types, and UL HB flame rating for strip types. F1 weatherability rating.

#### Gasketing

En-Seal <sup>™</sup> continuous perimeter poured gasket assures lens seal to housing.

#### **Electrical Chassis**

Gear Trays constructed of high reflective, 22-gauge, pre-painted steel.

## **Conduit Entry**

Standard housings available with one 7/8" conduit entry point on either or both ends. Consult Sales for other opening sizes or for top openings.

#### Lens

Thermoformed lenses available in tapered or shallow profile in crepe pattern clear acrylic or frost acrylic.

## Mounting

Standard stainless steel mounting brackets (BRKTS22PK) clip to housing for surface or all-thread pendant mounting. Consult sales for chain or cable mounting.

2MTARS lens, FEPW End Plug, and LPC latches shown.

## **Description**

The Sentry® series is A.L.P.'s flagship Gasketed Enclosure. For general purpose and energy-efficient surface or suspended Fluorescent and LED enclosure, suitable for wet, damp, dusty and cold applications. Gear Tray choices of 1 and 2 rows include Tube types (fluorescent and LED) or use of LED linear boards attached to your choice of flat or angled gear trays. Truly a multipurpose use enclosure for many solutions.

#### **Applications**

Ideal for use in dusty, dirty and/or wet environments including food processing, cold storage, kitchens, parking garages, car washes, covered canopies, pedestrian tunnels, concourse, industrial, and horticulture spaces.

For applications where the temperatures may exceed 80° C, A.L.P. recommends the use of stainless steel traylats. (i.e. three lamp/row fixtures)

## **Certifications**

- UL/cUL recognized component
- Wet Location listed
- NSF ANSI Standard 2

### **Features**

- Rigid one-piece housing construction.
- Two ¼-28 brass studs molded into back of housing for attachment of optional mounting brackets.
- En-seal <sup>™</sup> gasketing provides superior resistance to moisture absorption versus conventional gasketing.
- Lens retained by four suitcase style latches.
- Molded latch pockets compatible with standard and tamper-proof latches in stainless steel and polycarbonate.
- Gear trays secured to #10-32 brass studs molded into housing via threaded hex steel mounting standoffs.
- Gear tray mounts to #10-32 brass stud molded into housing by two plastics or steel Traylats. for easy, tool-less removal.
- LED Module tray available for one and two rows of nominal 22" LED boards.
- Gear tray suspends from housing by two security straps during servicing.
- 2ft Sentry LED Parking Garage is in Parking Garage Compliance when the Sentry 2ft LED Angled Gear Tray (SENTGT2P38LED) is paired with the Sentry 2ft Parking Garage Reflector (SENTGT2P38REF).

A.L.P. submitted this fixture for wet location testing in the horizontal surface mounted position. Any other operating position should be test verified by the OEM.

Please contact A.L.P. for pricing and delivery.

All specifications subject to change without notice. A.L.P. assumes no responsibility for these materials in any luminaire or application.

The product is an OEM component kit requiring final assembly by a qualified OEM fixture manufacturer.


Sealant required for wet location use.






### **EXPLODED VIEWS**


## **2FT Sentry LED or Fluorescent (Gear Tray Type)**

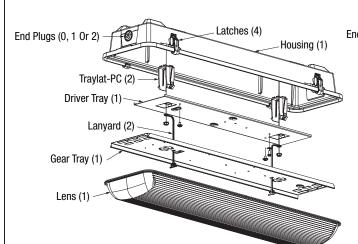


### **2FT Sentry LED Parking Garage**




### **TOP VIEW**



## **END VIEWS**



## **SIDE VIEW**



3-1/8"

1-7/8"

6-5/8"

Shallow Lens







# 2' Sentry® Series Fluorescent and LED

HOUSING (Select One		
Part Number	Description (Requires 4 latches per housing)	Packaging
2F-2-GTBS	2ft LED & Fluorescent Gear Tray Type 5VA Housing (2 end holes)	30 pcs carton; 120 pcs pallet
2F-2	2' Sentry HB Housing 7/8" hole on both ends <sup>3</sup>	30 pcs carton; 120 pcs pallet
LENS (Select one)		The production of the producti
Part Number	Description	Packaging
2MTARS100F	2ft Tapered Lens, Acrylic 100% FROST	30 pcs carton; 360 pcs pallet
2ARS00	2ft Shallow Lens, Acrylic/HI-IMPACT, Crepe pattern	30 pcs carton; 360 pcs pallet
2ARS15	2ft Shallow Lens, Acrylic/MED-IMPACT, Crepe pattern	30 pcs carton; 360 pcs pallet
GEAR TRAY <sup>6</sup> (Select of		· · · · · ·
Part Number	Description	Packaging
SENTRYGT2U	2ft Flourescent and LED Tube Flat Gear Tray, 2 Row	Bulk packaging
SENTRYGT2U-LED	2ft LED Flat Gear Tray, 2 Row	Bulk packaging
SENTGT2P38LED	2ft LED Angled LED, Parking Garage, 2 Row	Bulk packaging
CENTER REFLECTOR		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Part Number	Description	Packaging
SENTGT2P38REF	2ft LED Parking Garage Reflector (to achieve Parking Garage	Bulk packaging
	compliance, use SENTGT2P38LED & SENTGT2P38REF together)	, , , , , ,
DRIVER TRAY <sup>6</sup> (Selec	t one)	·
Part Number	Description	Packaging
SENTDT2-LED	2ft LED Driver Tray - 2 Row	Bulk packaging
SENTDT2-SR	2ft LED Driver Tray - 1 Row	Bulk packaging
LATCHES (Select one)		, , ,
Part Number	Description (Requires 4 latches per housing)	Packaging
LPC	White polycarbonate latch	30 pcs bag; 990 pcs carton.4
LPCTP3	Tamper-proof white polycarbonate latch with nut and screw	30 pcs bag; 990 pcs carton.4
LSS-3	Stainless steel latch	30 pcs bag; 480 pcs carton.4
LSS-3TP	Tamper-proof stainless steel latch with nut and screw	30 pcs bag; 480 pcs carton.4
WIRE ENTRY PLUGS	(Select none, one or two depending on housing selected)	
Part Number	Description	Packaging
FEPW	White 7/8" dry location plug	40 pcs bag; 5000 pcs carton.
LTP088 <sup>1</sup>	White 7/8" liquid tight plug	30 pcs bag; 1800 pcs carton.
DC-2S-7 <sup>1</sup>	7/8" die cast aluminum fitting assembly for 1/2" rigid conduit	30 pcs inner carton; 240 pcs
		carton.4
HOUSING MOUNTING	BRACKET (Select one)	
Part Number	Description	Packaging
BRKTS22PK	Sentry stainless steel strap bracket, 2-pack	60 pcs bag; 4960 pcs carton.
MISCELLANEOUS PA	RTS	
Part Number	Description	Packaging
TRAYLAT-PC	White polycarbonate gear tray mounting clip (NUT1001 Required)	60 pcs bag; 990 pcs carton.4
TRAYLATSS <sup>2</sup>	Stainless steel gear tray mounting clip (NUT1001 Required)	60 pcs bag; 960 pcs carton.4
10-32MFSTANDOFF	Threaded hex steel mounting standoff for 1-row LED module	120 pcs bag.4
	gear tray	
LANYARD	White nylon security strap	30 pcs bag; 4800 pcs carton.
HARDWARE <sup>5</sup>		
Part Number	Description	Packaging
NUT1001	#10-32x3/8" steel hex locking nut for TRAYLAT attachment	5000 pcs carton
	to housing	
TAMPER BIT 3	Driver bit for TAMPERPRUF screw used in LPCTP3 & LSS-3TP	
TAMPER BIT 8	Driver bit for tamper-proof snake eye drive screw, compatible with	100.0

- Sealant required for wet location use.
- A.L.P. recommends using TRAYLATSS for three lamp fixtures.
- 3. HB rated material are not acceptable for use as an electrical enclosure, they require an internal metal enclosure "strip fixture".
- Orders must be ordered in bag or carton qty's. 4.
- 5.
- If hardware is purchased through ALP the MOQ will be based on the outsourced vendor MOQ's For custom hole/feature patterns, supply Order Sheet to BBS or Customer Service Representative.

