



SMKDS-114

General Description

An all purpose economy fluorescent 1-light sidemount strip that can be adapted to be a double sidemount, right angle or 3-light strip.

All parts snap together for ease of installation and maintenance.

Features and Benefits

Double KO access on 4 ft and longer to facilitate wiring of units for multiple ballast configurations.

Snap-in end cap for faster and easier assembly.

Large selection of end plates available for a multitude of applications.

Dual function end cap allows for row mounting by sliding into built-in aligning lances.

Cable mounting in the center for greater adaptability.

Universal Yoke and Toggle Kit suspension option available.

All KDS bodies include the following options:

- KO for chain hanger
- Side KO for conduit
- Pull switch KO
- Starter KO
- Convenience outlet KO.

Ordering Information

Please call 877-257-5841 for price and delivery.



Housing

Die-formed heavy-gauge cold rolled steel.

Cover

Snap-on type to simplify installation. Two covers are used for 30-watt tandem and 40-watt tandems.

Ends and Socket Plates



Snap-in type. Ends also function as coupler for continuous row mounting. Socket plates accept slide-on or screw-down sockets.

Finish

Pre-painted white polyester polymer with minimum 82% reflectivity

Mounting

Surface or pendant mount, individually or in continuous rows. Sufficient knockouts are provided.

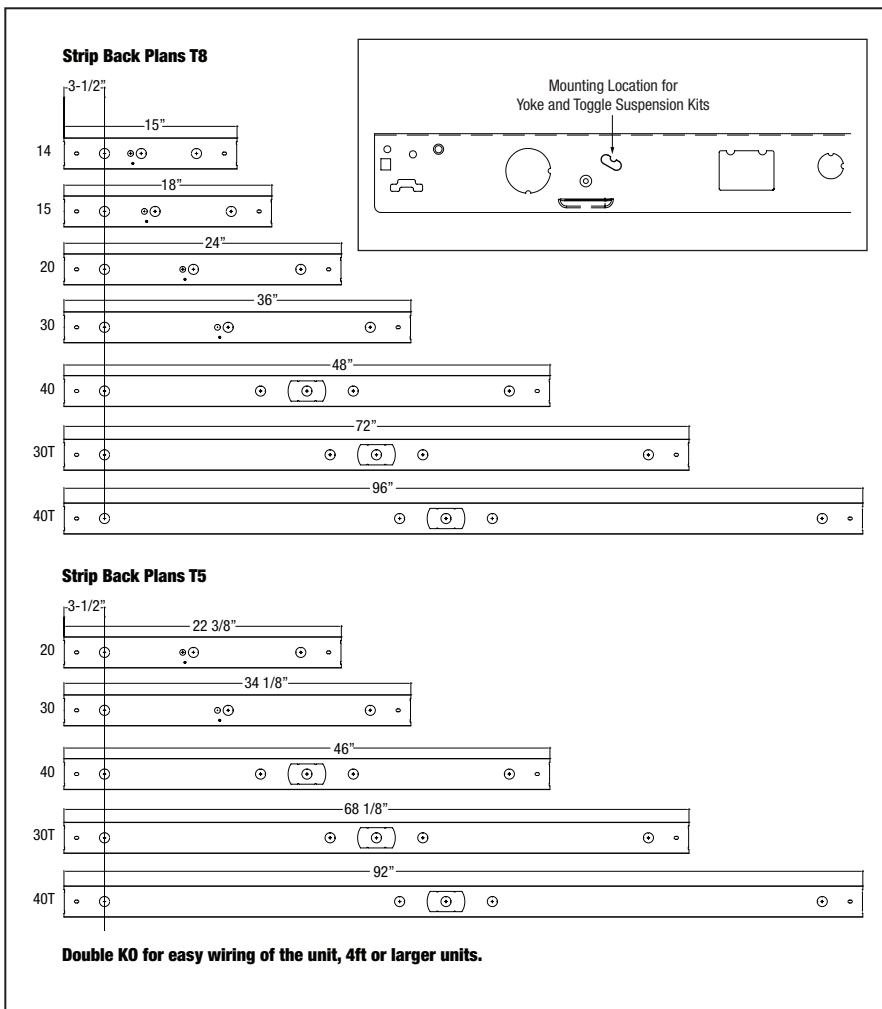

Lampholder Options

	Part Number	Description
	F1232T8-S	T8 rotary snap-in lampholder, rapid start ballast shunted, G13 medium bi-pin
	F1233T8-S	T8 rotary snap-in lampholder, instant start ballast non-shunted, G13 medium bi-pin
	F2010T8-S	T8 rotary snap-in lampholder, rapid start ballast shunted, G13 medium bi-pin
	F2001T8-S	T8 rotary snap-in lampholder, instant start ballast non-shunted, G13 medium bi-pin
	F2021T8-S	T8 rotary snap-in lampholder, rapid start ballast shunted, G13 medium bi-pin
	F2011T8-S	T8 rotary snap-in lampholder, instant start ballast non-shunted, G13 medium bi-pin
	F1501T5-S	T5 rotary snap-in lampholder G5 base, rapid start non shunted

Catalog No	Lamps	Lamp Type	Length	Body	Center Bracket (QTY)	Cover (QTY)	End (QTY)
SMKDS-114	1,2,3	T8	15"	SMKDS-114B		KDS-114C (1)	SMKDSE (2)
SMKDS-115	1,2,3	T8	18"	SMKDS-115B		KDS-115C (1)	SMKDSE (2)
SMKDS-120	1,2,3	T8	24"	SMKDS-120B		KDS-120C (1)	SMKDSE (2)
SMKDS-130	1,2,3	T8	36"	SMKDS-130B		KDS-130C (1)	SMKDSE (2)
SMKDS-140	1,2,3	T8	48"	SMKDS-140B		KDS-140C (1)	SMKDSE (2)
SMKDS-130T*	2,4,6	T8	72"	SMKDS-130TB*	SMKDSCTR (1)	KDS-130C (2)	SMKDSE (2)
SMKDS-140T*	2,4,6	T8	96"	SMKDS-140TB*	SMKDSCTR (1)	KDS-140C (2)	SMKDSE (2)
SMKDST5-120	1,2	T5	22.34"	SMKDST5-120B		KDST5-120C (1)	SMKDSE (2)
SMKDST5-130	1,2	T5	34.15"	SMKDST5-130B		KDST5-130C (1)	SMKDSE (2)
SMKDST5-140	1,2	T5	45.96"	SMKDST5-140B		KDST5-140C (1)	SMKDSE (2)
SMKDST5-130T*	2,4	T5	68.3"	SMKDST5-130TB*	SMKDSCTR (1)	KDST5-130C (2)	SMKDSE (2)
SMKDST5-140T*	2,4	T5	92"	SMKDST5-140TB*	SMKDSCTR (1)	KDST5-140C (2)	SMKDSE (2)

*Note: "T" — Tandem option

Optional Suspension Kits

Part Number	Description	Qty
4011003-KDS-10	Yoke and Toggle Kit	2

Notice

Dimensions subject to change without notice.

This product is an OEM component kit requiring final assembly by a qualified OEM fixture manufacturer.